



# TP120-347-RT8-C-DIM-G1-ES

8" Round Commercial 3 CCT & 3 Wattage Selectable






## DESCRIPTION

All in one solution 8" round recessed commercial grade LED fixture  
Perfect for hospitality, shopping mall & retail, office, exterior soffit, etc.

## FEATURES & BENEFITS

- User selectable 3 light colors & 3 power options
- Universal voltage 120V-347V input
- 0-10V Dimmable 5%-100%
- CRI 90+ for true color rendering
- Type IC, Wet location & Air-tight
- Regressed optics with low glare
- Suitable for new construction and retrofit applications

**DIMENSIONS** ID 7 7/8" OD 10 1/4" Regressed 2"  
Cut Out 7 7/8" to 9 1/2"

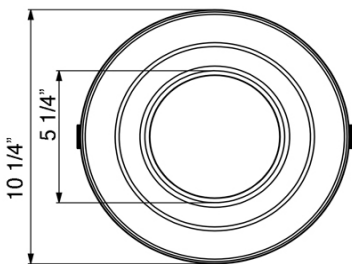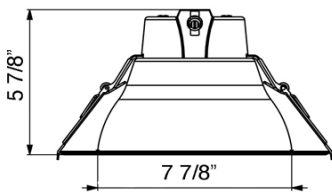



**ORDERING GUIDE** TP120-347-RT8-C-DIM-G1-ES

Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Trim: \_\_\_\_\_ Qty: \_\_\_\_\_  
 Notes: \_\_\_\_\_

SPECIFICATION	
Applications	Commercial Recessed Ceiling
Power Levels (W)	10   15   22
Light Output (lm)	1000   1500   2000
Color Temperature (K)	3CCT: 3000K - 3500K - 4000K
Beam Angle	90°
CRI	90 +
Input	120V-347V AC 50/60 Hz
Dimming	0 - 10V
Approved Location	Insulated Ceiling & Wet Locations
Air Tight	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus, Energy Star, T24
Warranty	5 Year

## Trim Options



Matte White RAL9003

## ACCESSORIES

Sold Separately




Black trim cover cat # **LBL-8CRT-B**




Silver trim cover cat # **LBL-8CRT-S**



Goof Ring White OD 12 1/2" cat # **LBL-8CGR-W**



New Construction Mounting Plate for Stud Ceiling  
cat # **LBL-MP-C4-8-STUD**



New Construction Mounting Plate for T-bar Ceiling  
cat # **LBL-MP-C4-10-TBAR**

## COMPLIANCE



Type IC  
Air-Tight